

A

B

C





D

E

版次	日期	内 容

Electrical properties

- 1、Current rating: 1A AC\DC (AWG #26)
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 100MΩ min
- 6、Withstanding voltage: 250V AC/ minute
- 7、Material : Nylon UL94V-0(2)

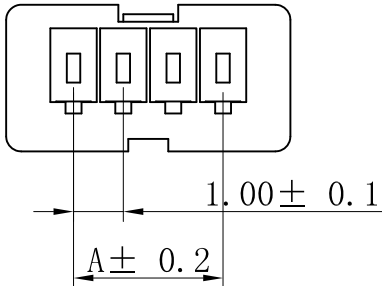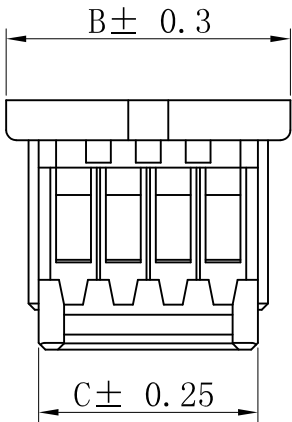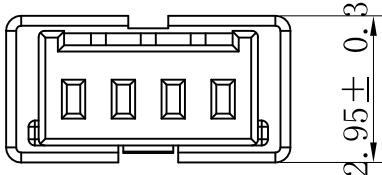

孔位 poles	A	B	C
2	1.00	3.70	2.40
3	2.00	4.70	3.40
4	3.00	5.70	4.40
5	4.00	6.70	5.40
6	5.00	7.70	6.40
7	6.00	8.70	7.40
8	7.00	9.70	8.40
9	8.00	10.70	9.40
10	9.00	11.70	10.40
11	10.00	12.70	11.40
12	11.00	13.70	12.40
13	12.00	14.70	13.40
14	13.00	15.70	14.40
15	14.00	16.70	15.40

浙江乐马电气有限公司		设计	张书晨
尺寸公差	角度公差	品名: 501330-nY	审核 王佳
.X ±0.25	X.° ±3.0°	图号: 10002-Y	批准 陈其林
.XX ±0.15	.X° ±2.0°		
.XXX ±0.05	.XX° ±1.0°	比例: --	页数: 1/1
		单位: mm	版本: A