
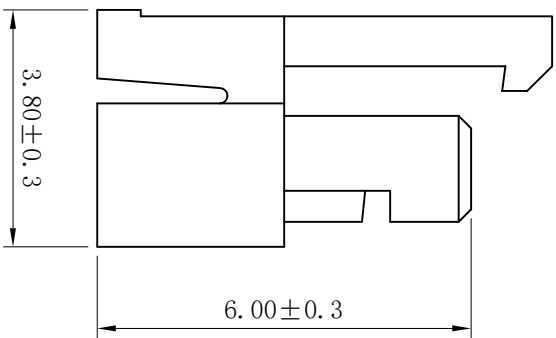
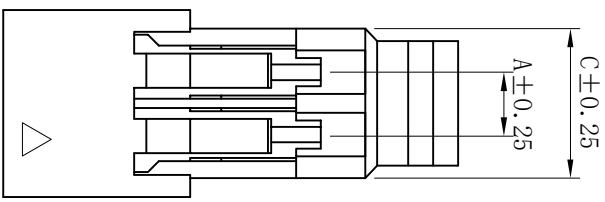


版次	日期	内容

Electrical properties

- Current rating: 1A AC\DC
- Voltage rating: 150V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20mΩ max
- Insulation resistance: 100MΩ min
- Withstanding voltage: 500V AC/ minute
- Material : Nylon UL94V-0(2)

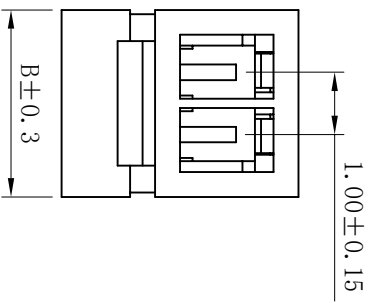

孔位 poles	A	B	C
2	1.00	3.00	2.40
3	2.00	4.00	3.40
4	3.00	5.00	4.40
5	4.00	6.00	5.40
6	5.00	7.00	6.40
7	6.00	8.00	7.40
8	7.00	9.00	8.40
9	8.00	10.00	9.40
10	9.00	11.00	10.40
11	10.00	12.00	11.40
12	11.00	13.00	12.40
13	12.00	14.00	13.40
14	13.00	15.00	14.40
15	14.00	16.00	15.40
16	15.00	17.00	16.40
17	16.00	18.00	17.40
20	19.00	21.00	20.40

浙江乐马电气有限公司 设计 张书晨

尺寸公差	角度公差	品名:	审核	王佳
.X ±0.25	X.° ±3.0°	HN-nY	批	陈其林
.XX ±0.15	.X° ±2.0°	图号:	批准	
.XXX ±0.05	.XX° ±1.0°	10003-Y	版本:	A
	单位: mm	比例: --	页数:	1/1