
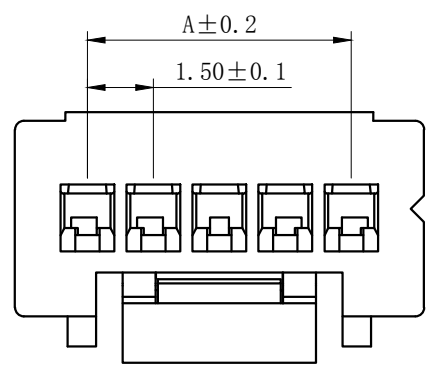
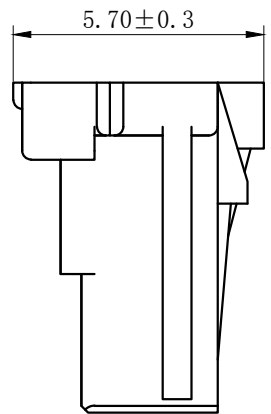


5		6	
版次	日期	内 容	

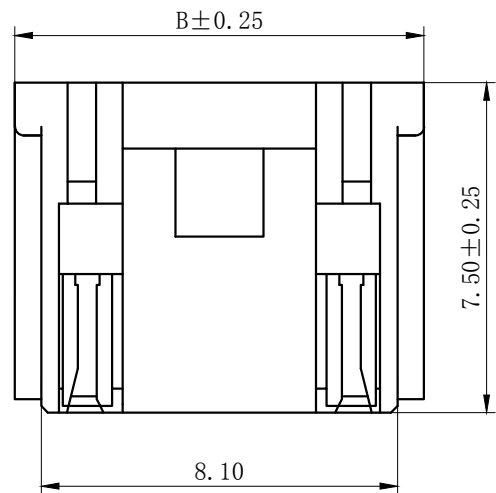

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 100V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 500MΩ min
- 6、Withstanding voltage: 500V AC/ minute
- 7、Material : Nylon UL94V-0(2)

孔位 poles	A	B	C
2	1.50	4.80	3.60
3	3.00	6.30	5.10
4	4.50	7.80	6.60
5	6.00	9.30	8.10
6	7.50	10.80	9.60
7	9.00	12.30	11.10
8	10.50	13.80	12.60
9	12.00	15.30	14.10
10	13.50	16.80	15.60
11	15.00	18.30	17.10
12	16.50	19.80	18.60
13	18.00	21.30	20.10
14	19.50	22.80	21.60
15	21.00	24.30	23.10
16	22.50	25.80	24.60

浙江乐马电气有限公司		设计	张书晨	
尺寸公差	角度公差	品名:	ZE-nY	
.X ±0.25	X.° ±3.0°	图号:	15002-Y	
.XX ±0.15	.X° ±2.0°	单位:	比例:	页数:
.XXX ±0.05	.XX° ±1.0°	mm	--	1/1
		批准	陈其林	
		版本:	A	