

1

2

3

4

5

6




版次

日期

内 容

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 500MΩ min
- 6、Withstanding voltage: 500V AC/ minute
- 7、Material : Nylon UL94V-0(2)

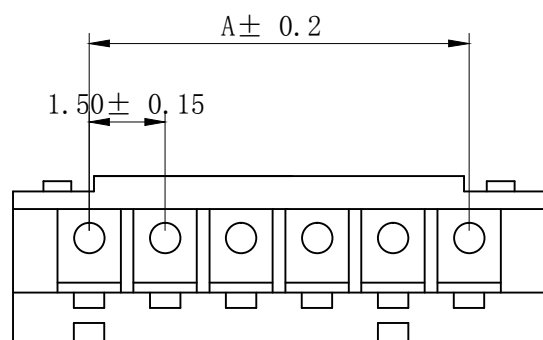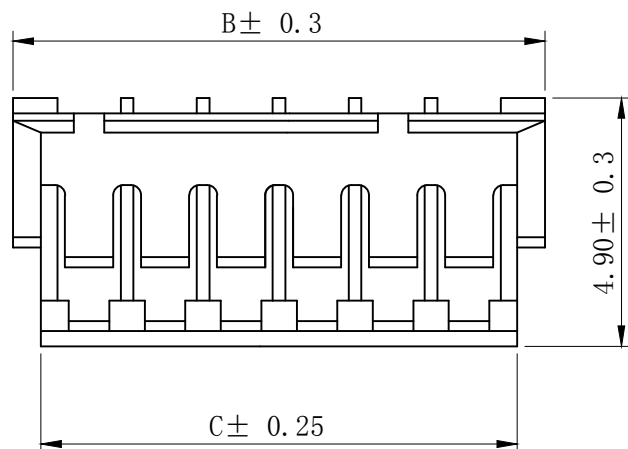

孔位 poles	A	B	C
2	1.50	4.50	3.40
3	3.00	6.00	4.90
4	4.50	7.50	6.40
5	6.00	9.00	7.90
6	7.50	10.50	9.40
7	9.00	12.00	10.90
8	10.50	13.50	12.40
9	12.00	15.00	13.90
10	13.50	16.50	15.40
11	15.00	18.00	16.90
12	16.50	19.50	18.40
13	18.00	21.00	19.90
14	19.50	22.50	21.40
15	21.00	24.00	22.90

浙江乐马电气有限公司			设计	张书晨	
尺寸公差	角度公差	品名: ZH-nY	审核	王佳	
.X ±0.25	X.° ±3.0°				
.XX ±0.15	.X° ±2.0°				
.XXX ±0.05	.XX° ±1.0°	图号: 15001-Y	批准	陈其林	
单位: mm		比例: --			