

版次	日期	内 容

A

A

B

B

C




C

D

D

E

E

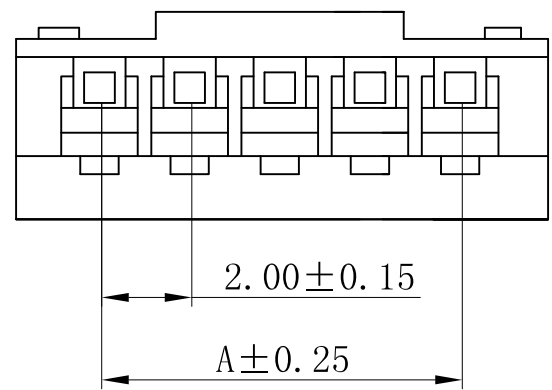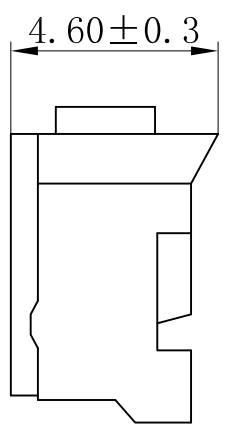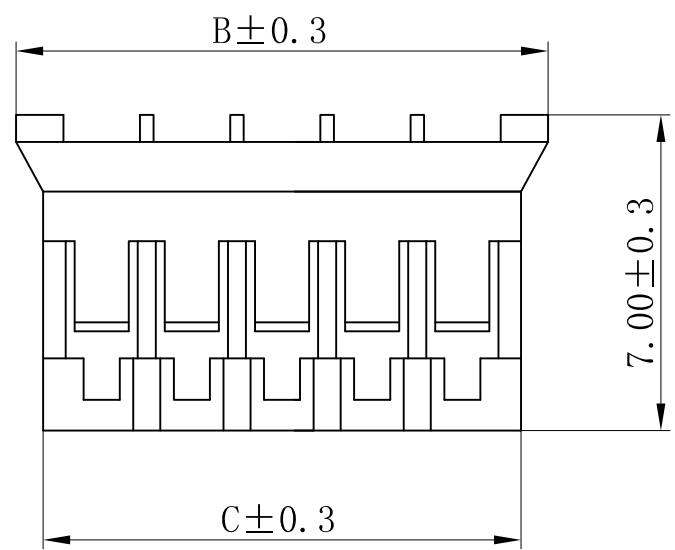

Electrical properties

- 1、Current rating: 2A AC\DC
- 2、Voltage rating: 100V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 1000MΩ min
- 6、Withstanding voltage: 800V AC/ minute
- 7、Material : Nylon UL94V-0(2)

Circuits	Dimension mm		
	A	B	C
2	2.00	5.80	4.55
3	4.00	7.80	6.55
4	6.00	9.80	8.55
5	8.00	11.80	10.55
6	10.00	13.80	12.55
7	12.00	15.80	14.55
8	14.00	17.80	16.55
9	16.00	19.80	18.55
10	18.00	21.80	20.55
11	20.00	23.80	22.55
12	22.00	25.80	24.55
13	24.00	27.80	26.55
14	26.00	29.80	28.55
15	28.00	31.80	30.55
16	30.00	33.80	32.55

浙江乐马电气有限公司		设计	张书晨
尺寸公差	角度公差	品名: PH-nY	审核 王佳
.X ±0.25	X.° ±3.0°	图号: 20001-Y	批准 陈其林
.XX ±0.15	.X° ±2.0°		
.XXX ±0.05	.XX° ±1.0°	比例: --	页数: 1/1
		单位: mm	版本: A